


# TTL11.5-25-110C

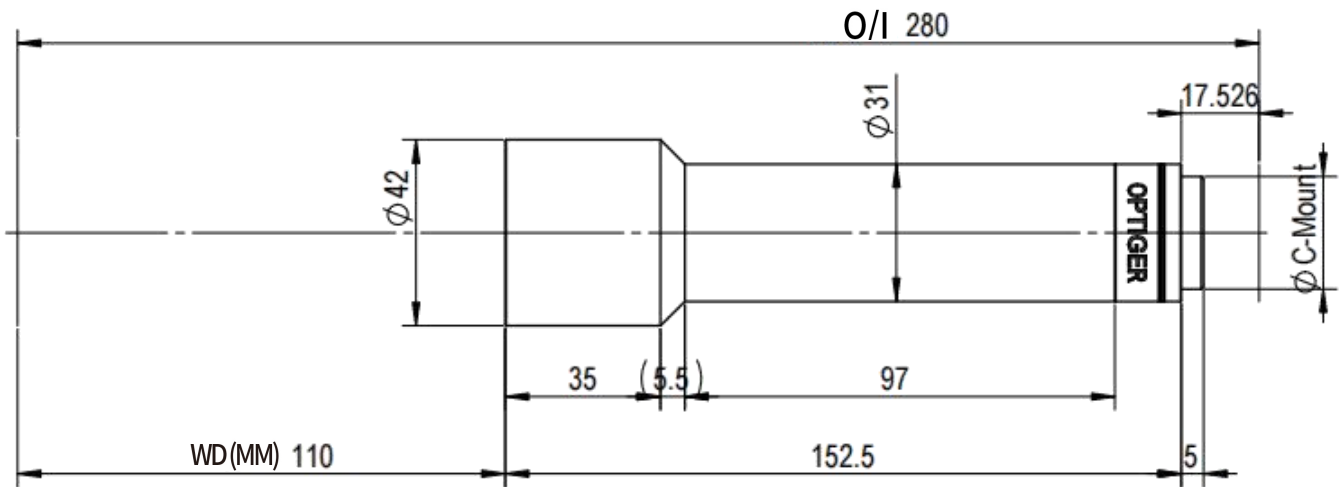

Unit: mm

## Specifications

Max. FOV(mm)	25
Sensor Size (mm)	11.5
Magnification	0.460
WD (mm)	110±5
Effective F-number	7
Object-side Resolution (um)	10.21
DOF (mm)	2.65
Measured Telecentricity	0.02°
Measured Distortion	0.015%
Mount	C-Mount
Length(mm)	152.5
Diameter (mm)	42
Weight (g)	245

**DESIGNED IN GERMANY**  
ULTRA HIGH PERFORMANCE BI-TELECENTRIC LENSES

## Features


Available for cameras with sensor size of 2/3"

Available for cameras with pixel size of 3.45um

## FOV (mm\*mm)

1/2"(6.4X4.8)	13.9X10.4
2/3"(8.8X6.6)	19.1X14.3
Max Sensor Size(9.2X6.9)	20.0X15.0

# TTL11.5-25-110C-D

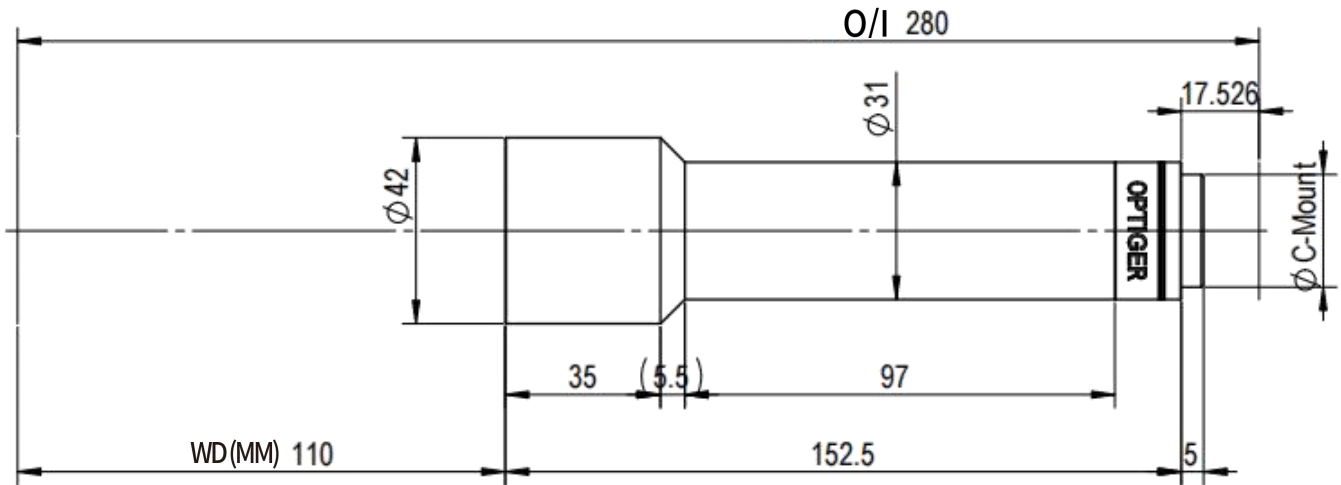

Unit: mm

## Specifications

Max. FOV(mm)	25
Sensor Size (mm)	11.5
Magnification	0.460
WD (mm)	110±5
Effective F-number	16
Object-side Resolution (um)	23.34
DOF (mm)	6.05
Measured Telecentricity	0.015°
Measured Distortion	0.002%
Mount	C-Mount
Length(mm)	152.5
Diameter (mm)	42
Weight (g)	245

**DESIGNED IN GERMANY**  
ULTRA HIGH PERFORMANCE BI-TELECENTRIC LENSES

## Features

Available for cameras with sensor size of 2/3"

Available for cameras with pixel size of 3.45um

## FOV (mm\*mm)

1/2"(6.4X4.8)	13.9X10.4
2/3"(8.8X6.6)	19.1X14.3
Max Sensor Size(9.2X6.9)	20.0X15.0